

(19) World Intellectual Property Organization

International Bureau

WIPO

(43) International publication date

5 April 2001 (05.04.2001)

PCT

(10) International publication number

WO 01/23259 A1

(51) International patent classification<sup>7</sup>: B65B 7/28

(21) International application number: PCT/DE00/03445

(22) International filing date: 27 September 2000 (27.09.2000)

(25) Language of filing: German

(26) Language of publication: German

(30) Data relating to the priority:  
299 17 251.1 30 September 1999 (30.09.1999) DE

(71) Applicant (for all designated States except US):  
GEBRÜDER LEONHARDT GMBH & CO. KG  
BLEMA KIRCHEIS [DE/DE]; Bahnhofstrasse 63-65,  
08280 Aue (DE).

(72) Inventors; and

(75) Inventors/Applicants (US only): BEYRICH, Karl-  
heinz [DE/DE]; Galerieweg 09, 08280 Aue (DE).  
ENDERLEIN, Lutz [DE/DE]; Mühlbergblick 15,  
08289 Schneeberg (DE). GOLDHAHN, Arndt  
[DE/DE]; Robert-Koch-Strasse 8, 08280 Aue (DE).  
KLIMMT, Uwe [DE/DE]; Hauptstrasse 52, 08312  
Lauter (DE).

(74) Attorney: THOSS, Eberhard; Am Wiesengrund 07,  
08146 Ortmannsdorf-Marienau (DE).

(81) Designated states (national): CA, JP, MX, US.

(84) Designated states (regional): European Patent (AT,  
BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,  
MC, NL, PT, SE).

Published:


- With the International Search Report.

[continued on next page]

As printed

(54) Title: DEVICE FOR TRANSFERRING MEMBRANES INTO A CONTINUOUSLY OPERABLE SEALING CARROUSEL FOR HEAT SEALING CAN-SHAPED PACKAGING MATERIALS

(54) Bezeichnung: VORRICHTUNG ZUM ÜBERFÜHREN VON MEMBRANEN IN EIN KONTINUIERLICH BETREIBBARES SIEGELKARUSSELL ZUM HEISSIEGELN VON DOSENFÖRMIGEN VERPACKUNGEN

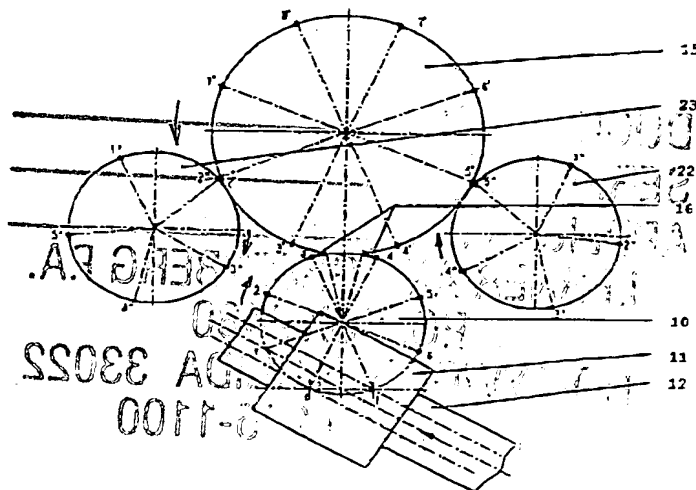

(57) Abstract: The invention relates to a device for transferring membranes into a continuously operable sealing carousel for heat sealing can-shaped packaging materials, whereby a rotating transfer station is connected upstream from said sealing carousel. The inventive device is characterized in that the transfer station is designed as a membrane star (10) that can driven in a timed manner, and a cutting tool (11) used for a membrane strip processing (12) is provided above the membrane star (12). A transfer of cut-out membranes (13) from the membrane strip to the membrane star (10) can be effected during the resting phases (14) of the membrane star (10), and an advancing of membranes (13) positioned on the membrane star (10) to the sealing carousel (15) can be effected during the movement phases of the membrane star (10).

[continued on next page]